

Cylinder Accessories



Adjustable Cylinder Wall Bracket (Part No. SG6206) –

molded from glass reinforced thermoplastic, it can be adjusted to fit any cylinder from 3.5" OD to 14" OD. The 1½" wide by 50" long polypropylene strap has a nickel-plated, steel, non-slip spring catch and buckle for fast adjustment. A steel chain with bitsnap closure is provided for secondary security. Recessed mounting holes are located in each end of the bracket for mounting to a wall.




Cylinder Bench Clamp with Safety Chain (Part No. SG6202C*) –

Same as our SG6202 Cylinder Wall Bracket, but includes a sturdy safety chain for extra security in case of fire.



Two Cylinder Wall Bracket (Part No. SG6207) and Three Cylinder Wall Bracket (Part No. SG6208) –

forged from heavy 11 gauge HR steel, finished in chemical resistant epoxy, and fitted with steel reinforced polyethylene edge guards, they will safely support cylinders up to 12" OD. Each bracket includes 1½" wide by 40" long polypropylene straps with nickel-plated steel non-slip spring catches and buckles for fast adjustment.

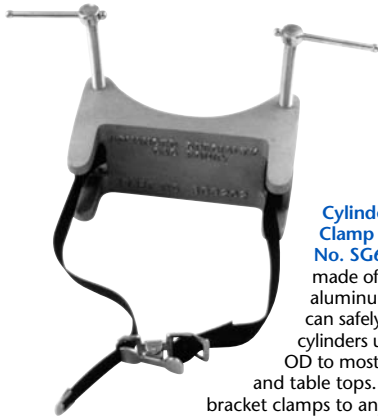

Cylinder Bench Clamp (Part No. SG6202*) –


made of cast aluminum, it can safely secure cylinders up to 14" OD to most bench and table tops. The

bracket clamps to any flat surface up to 17/8" thick with a minimum 1½" overhang and is tightened by two steel screws with sliding T-handles and swivel pads. The 1" wide by 54" long nylon strap has a nickel-plated, steel, non-slip spring catch and buckle for fast adjustment.



*Replacement Strap (Part No. SG6209) –

The nylon replacement strap for Models SG6202 and SG6203.



Cylinder Wall Bracket with Safety Chain (Part No. SG6203C*) –

Same as our SG6203 Cylinder Wall Bracket, but includes a sturdy safety chain for extra security in case of fire.



Cylinder Wall Bracket (Part No. SG6203*) –

made of cast aluminum, it can support cylinders up to 14" OD. The 1 inch wide by 54" long nylon strap has a nickel-plated, steel, non-slip spring catch and buckle for fast adjustment. Recessed mounting holes are located in each end of the bracket for mounting to a wall, or any vertical surface.



Cylinder Valve Wrench (Part No. SG6226) –

Safely assists in opening and closing high pressure cylinder valves while preventing over-tightening using a three pin safety design. One pin is made of copper that will deform prior to over-tightening of the cylinder valve. The other pins are made from stainless steel.



Teflon® TFE Thread Sealant Tape (Part No. 0202-5126) –

designed for application on 1/8", 1/4" and 3/8" male tapered pipe threads as a lubricant to prevent galling of pipe threads. The tape measures 1/4" wide x 576" long and is supplied in a plastic case.

Note: Tape is manufactured to conform to military specifications: MIL-T-27730A and for use with temperatures up to 450°F.



8 Ounce Snoop® Liquid Leak Detector (Part No. 0202-3032) –

designed for leak-testing pressurized gas systems, it is provided in a squeezable plastic bottle with an extendible 12" tube for detecting gas leaks in hard-to-reach places.

Note: Snoop® exceeds the performance requirements of military specifications: Mil-L-25567D Type 1, Leak Detection Compound, Oxygen Systems, for use over a temperature range of +27°F to 200°F.

1 Gallon Snoop® Liquid Leak Detector (Part No. 0202-3031) –

designed for use in filling small trays or tanks for immersion leak-testing of pressurized components, or for refilling the smaller 8 oz. bottles (0202-3032).

